


PLATINUM PANEL RANGE




4000K Backlit LED Panel Lights



36W 600x600Panel Light
NW-6060BL - 4000K
36W, 3600lm 595x595x25mm



50W 600x1200Panel Light
NW-60120BL - 4000K
50W, 5000lm 595x1195x25mm

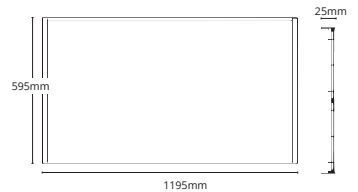

PRODUCT FEATURES

- Slim seamless backlit LED panel
- Low Glare
- Dimmable options available
- 120° Beam angle
- IP40 rated



TECHNICAL SPECIFICATIONS

LIFESPAN	50,000 hours
INPUT VOLTAGE	AC200-240V
BEAM ANGLE	120°
OPERATING TEMP	-10°~+40°C
CERTIFICATIONS	RoHS, SAA, CE
IP RATING	IP40
FREQUENCY	50Hz

CRI	>80
POWER FACTOR	0.9
LED TYPE	SMD
COLOUR OPTIONS	White
DIMMABLE	No (0-10V & DALI options)
COLOUR TEMP	4000K

See Page 24 for Panel Accessories