



PURE UNDERVERANDAH RANGE

CCT Selectable LED Underverandah

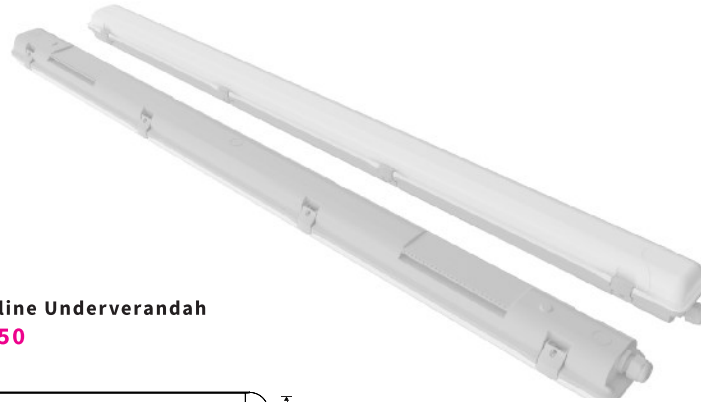




50W Slimline Underverandah
PLUV1550



PRODUCT FEATURES

- PC housing with PC diffuser
- Middle and side cable entry
- CCT selectable 4000K, 5000K, 6500K

TECHNICAL SPECIFICATIONS

PRODUCT	Slimline Underverandah	IK RATING	IK08
ORDERING CODE	PLUV1550	BEAM ANGLE	120°
POWER	60W	DIMMING	Non-dimmable
FITTING COLOUR	White and Grey	VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 5000K, 6500K	POWER FACTOR	0.9
LUMEN OUTPUT	4250lm-5250lm	LED TYPE	SMD
DIMENSIONS	1500 X 90 X 75mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	  
IP RATING	IP65		



Non-dimmable



CCT



Warranty



IP Rating



Lifespan